


Wall Mount Buss Bars

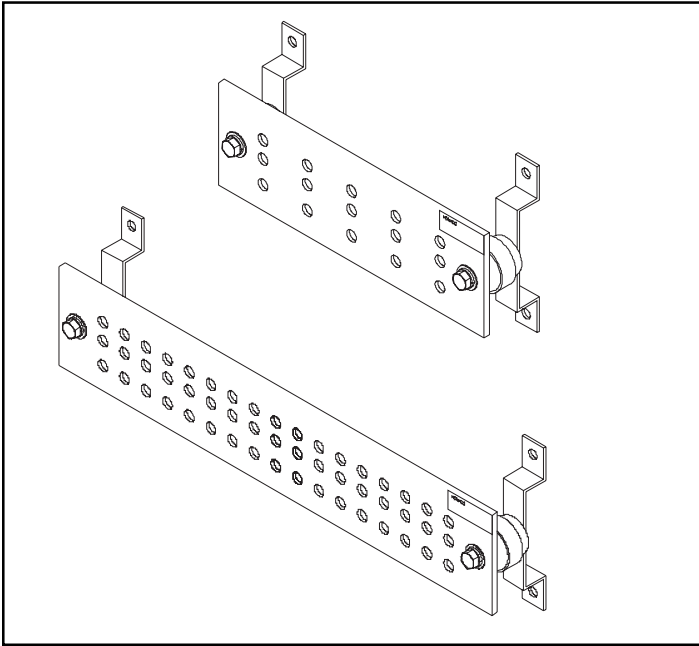

WMBB-12, top; WMBB-20, bottom

Homaco Wall Mount Buss Bars mount to the wall to provide a central ground point for telecommunications equipment. The insulated ground bars protect cables entering the building from destructive electric activity. *Note: Effective grounding is a measure of continuity; be sure to use an appropriate grounding system as required by the installation.*

Features:

- The preassembled buss bar kit includes:
 - 1 qty, 1/4" thick wall buss bar
 - 2 qty, insulators
 - 2 qty, standoff brackets and hardware
- 7/16" diameter lug holes
- Accommodates 3/4", 1", and 1-3/4" center-to-center spaced two hole lugs
- Buss bar constructed of electrolytic tough pitch 110 alloy copper bar
- Insulators constructed of glass reinforced thermoset polyester
- Provides 2-3/4" standoff from back board
- 3/8" wall mounting hardware not included
- Listed to UL 467

Ordering Information:

Catalog No.	Dimensions	Number of Holes*	Ship Weight
WMBB-12	4.00"H x 12.00"W x 2.75"D	15	5 lbs
WMBB-20	4.00"H x 20.00"W x 2.75"D	51	8 lbs

*Mounting holes not included in total.

1875 W. Fullerton Ave. ■ Chicago, IL 60614

Phone: 888-446-6226 ■ Fax: 773-384-6080 ■ www.homaco.com