

## XLBET Worksheet

When ordering a customized XLBET Frame, please photocopy this worksheet, fill it out and fax it to 773-384-6080 or call 1-888-4-HOMACO for expert assistance.

1. Frame Type:
    - 110D-3600XLB, Single-sided
    - 110D-7200XLB, Double-sided
  2. 110 Clip Type\*:
    - 3-pair     4-pair     5-pair
  3. Standard Cable:
    - ALVYN shielded 900-pair CMR rated 24 AWG (ARTM)
    - ALPETH shielded 900-pair 26 AWG (BKTA)
    - 100-pair 24 AWG CMR (riser) PVC jacket
    - 300-pair 24 AWG CMR (riser) PVC jacket
- Stub Direction:
- Up                       Down
- Location:
- Right side             Left side

Stub Length: \_\_\_\_\_  
(Measured from cable exit point on the frame. Homaco recommends 5'-10' cascading stubs)

4. Cable Connector Type:
    - 25-pair male     25-pair female
    - Raw ended stub
- or Connector Panel Location:
- Top             Bottom
- Male             Female

5. Computer Floor: \_\_\_\_\_  
Turn to page 70 for information.

6. Indicate block position and direction of wiring on drawings below
  - T = terminated blocks
  - N = unwired blocks
  - C = connector panel
  - V = vacant position
  - P = protectors



*Example shows terminated blocks wired horizontally.*



7. Wiring Pattern (page 31):
  - Vertical             Horizontal

Company \_\_\_\_\_

Contact \_\_\_\_\_

Phone \_\_\_\_\_

Email \_\_\_\_\_

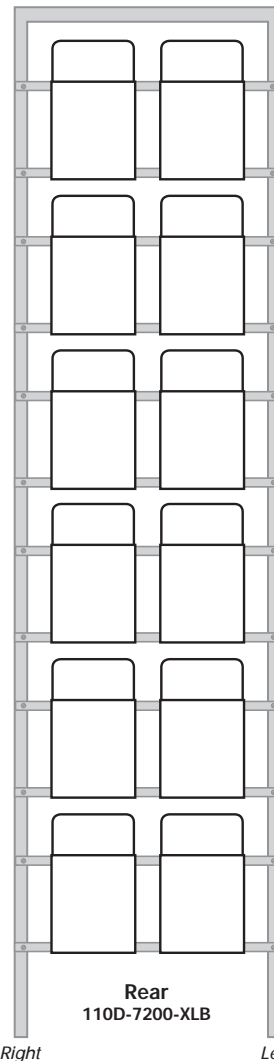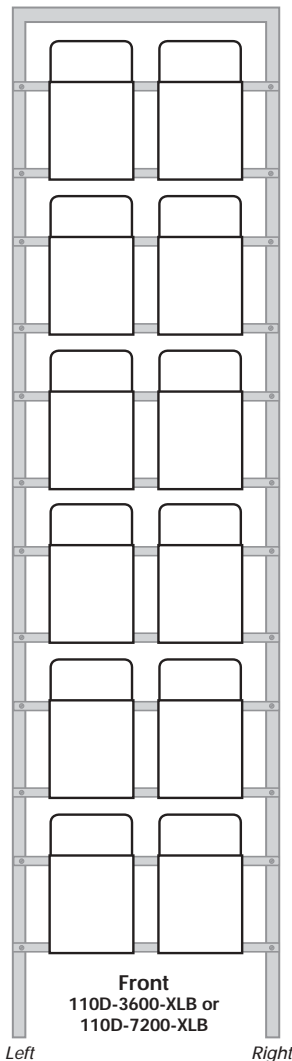

\* If 3- or 4-pair clips are selected, the last clip will be a 4- or 5-pair clip, respectively.  
Note: Connector panel takes the place of a 600-pair module.