



50M-600W terminates 600 pairs and can be used together with 50M-2000W.

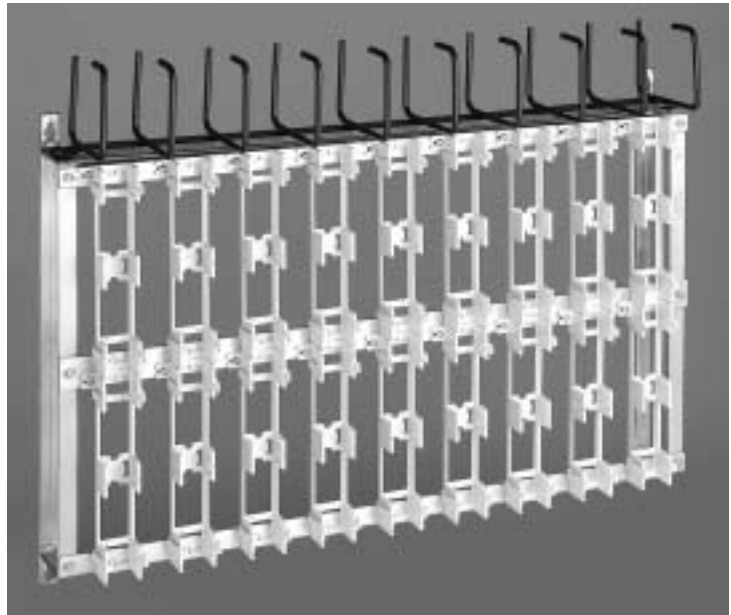

50M-900W terminates 900 pairs. It is the same module used on 50M frames but has been adapted to mount directly on the wall.

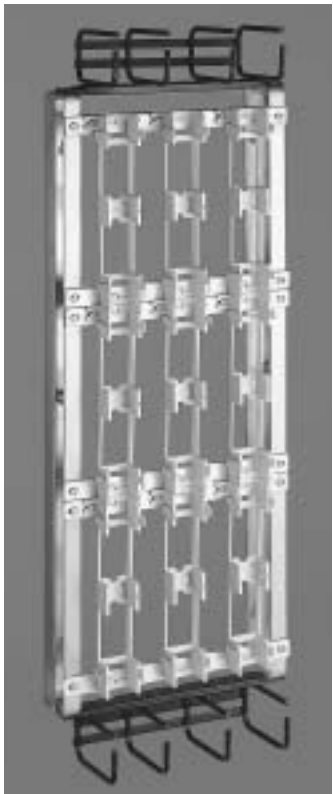

50M-450W terminates 450 pairs and can be used together with 50M-1500W.

50M-W Wall Mount Modules

Homaco has an additional line of 50M modules designed for wall mounting only. Six modules are available – 50M-400W, -450W, -600W, -900W, -1500W and -2000W – to terminate from 400 to 2,000 pairs on 66 blocks.* Blocks are mounted closely together without congestion since cables are routed behind the jumper field. The result is a compact, easily maintained termination package.

50M-W Wall Modules feature keyhole slots for easy mounting, built-in cable management, factory-installed H89 brackets, rounded edges on modules, and unobstructed paths for cross connecting. For add-ons, the 50M-450W matches the profile of the 50M-1500W, while the 50M-600W matches up with the 50M-2000W.


Features:

- For main distribution, centralized station equipment or PBX applications
- Designed for wall installations
- Terminates from 400 to 2,000 pairs based on module selected
- Mounts any block that fits in an H89 bracket
- Separate horizontal and vertical jumper paths provide clearly defined jumper routing and quick tracing
- Built-in cable management keeps cables and jumpers organized
- Pre-assembled and ready to go right out of the box


Specifications:

- 6061-T6 structural grade aluminum
- Listed to the UL 1863 Standard for Communication Circuit Accessory

* Blocks are not included.

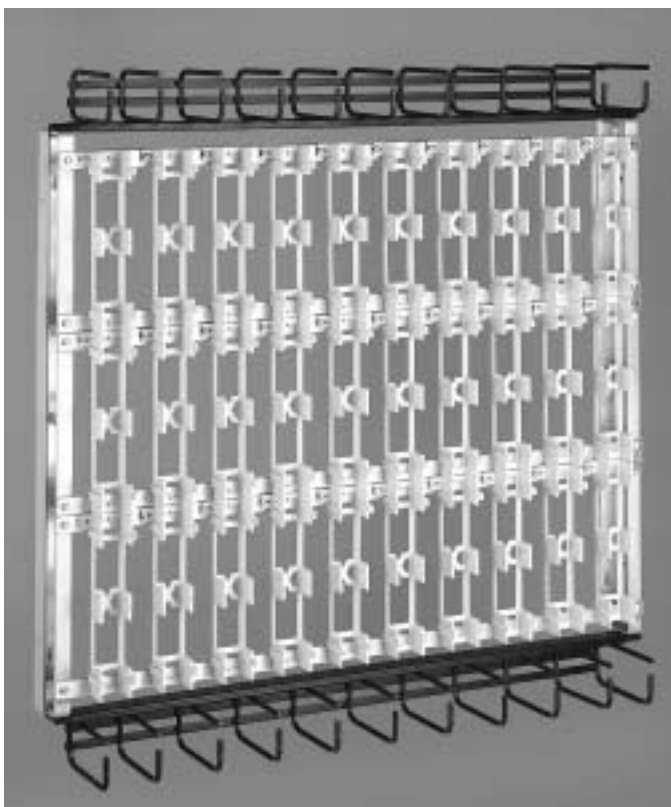

50M-1500W terminates 1,500 pairs.

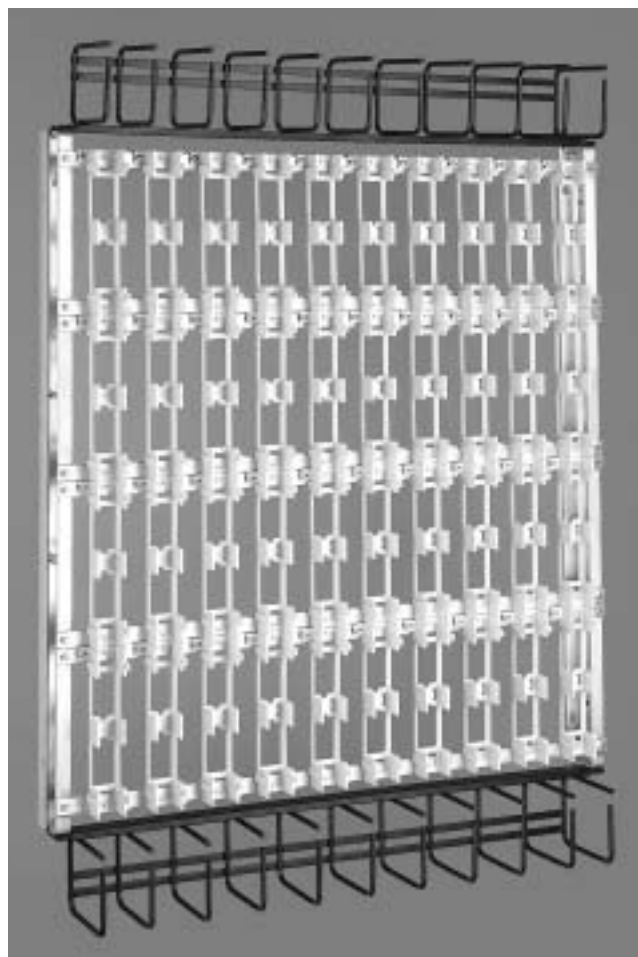

50M-2000W terminates 2,000 pairs.

Catalog No.	Block Capacity	No. of Pairs	Dimensions	Ship Weight
50M-400W	8	400	26.75"H x 16.75"W x 7.25"D	19 lbs
50M-450W	9	450	38.88"H x 13.31"W x 6.19"D	19 lbs
50M-450WL	9	450	38.88"H x 13.31"W x 8.50"D	21 lbs
50M-600W	12	600	50.88"H x 13.50"W x 6.19"D	22 lbs
50M-600WL	12	600	50.88"H x 13.50"W x 8.50"D	26 lbs
50M-600W-SF	12	600	26.94"H x 35.25"W x 5.81"D	22 lbs
50M-900W	18	900	27.31"H x 35.25"W x 7.25"D	22 lbs
50M-900WL	18	900	27.31"H x 35.25"W x 9.56"D	26 lbs
50M-1500W	30	1,500	38.88"H x 39.53"W x 6.19"D	45 lbs
50M-1500WL	30	1,500	38.88"H x 39.53"W x 8.50"D	47 lbs
50M-2000W	40	2,000	50.88"H x 39.53"W x 6.25"D	50 lbs
50M-2000WL	40	2,000	50.88"H x 39.53"W x 8.56"D	52 lbs

* Blocks are not included. W = wall-mounted; L = added cabling and jumpering space. SF = Module designed to mount connectorized blocks.

Homaco Hint:

A variety of blocks can be mounted on 50M Wall Modules: H66M1-50, H66M4-50, and H66M4-100. Terminations must be completed with care to control jumpering and reduce congestion if H66M4-100 blocks are used.