

110D Series Double-Sided Floor Frames

Our patented 110D Double-Sided Floor Frames will help you save space, reduce cabling and jumpering costs and build consistency in your installations. The 110D-7200 series provides exceptional room for cable management and is well suited for multiple-frame installations with its large horizontal jumper areas. The 110D-9000 series is designed for maximum termination density and is best suited for a room with space for only one or two frames.

Features:

- For main distribution, centralized station equipment or PBX applications
- 110D double-sided frames terminate either 7,200 pairs or 9,000
- Mounts high-density 300-pair or 100-pair 110D blocks
- Lowest block position is 18" off the floor for convenient installer access
- Separate horizontal and vertical jumper paths provide clearly defined jumper routing and quick tracing
- Built-in horizontal rings keep jumpers organized
- 6" vertical channels provide extra cable capacity
- Velcro cable retainers manage vertical cables in channel uprights
- Frames can be junctioned together in multiple-frame lineups
- Kit available for mounting 188 protectors in any position on 110D-7200
- Pre-assembled and ready to go right out of the box
- Pre-terminated frames also are available (see page 26)
- Includes 12" cable runway support

Specifications:

- 6061-T6 structural grade aluminum uprights
- Drilled and tapped on both sides
- 5/8" floor anchoring holes on base feet
- Eight locations for attaching a ground
- Greystone finish
- Listed to the UL 1863 Standard for Communication Circuit Accessory

Catalog No.	Block Capacity*	No. of Pairs	Dimensions	Ship Weight
110D Series Double-Sided Floor Frames				
110D-7200	24	7,200	84.00"H x 37.50"W x 21.25"D	145 lbs
110D-9000	30	9,000	84.00"H x 37.50"W x 21.25"D	150 lbs

*110D blocks are not included. Junctioning bolts, bond bars, grounding screws and screws for installing blocks are included.

110D Series Double-Sided Floor Frames with Blocks				
110D-7200-101	24	7,200	84.00"H x 37.50"W x 21.25"D	150 lbs
110D-9000-101	30	9,000	84.00"H x 37.50"W x 21.25"D	155 lbs


Junctioning bolts, bond bars, grounding screws and screws for installing blocks are included.

Homaco Hint:

Need C4 or C5 clips? Turn to page 67 for ordering information.

Homaco Hint:

Already have a 110D-3600 or 110D-7200 frame and decide later you need to mount 188 protectors? Order Homaco PAK-110D-188 Kit (see page 53) for 110D frames.

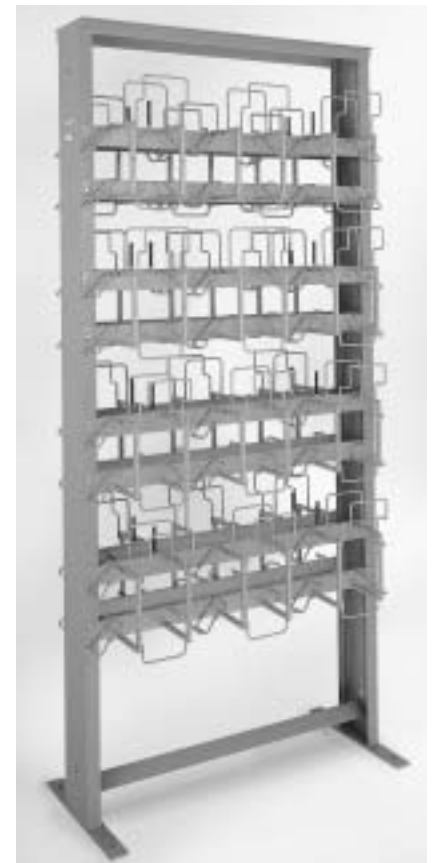

The double-sided **110D-7200 Frame*** has modules on both sides to terminate 7,200 pairs.



The **110D-9000 Frame** is a double-sided frame used primarily in higher density installations requiring high pair counts with limited space for multiple frames.

* Blocks are not included.